

# B60

Fluorescent Emergency Ballast

# PHILIPS bodine

A Division Of Philips Electronics North America Corporation

**Two-lamp emergency illumination;  
End-of-lamp-life compatible**

## Product Summary

### UL LISTED

Factory or Field Installation

### Illumination Time

90 Minutes

### Initial Light Output

600 - 700 Lumens

### Full Warranty

3 Years (NOT pro-rata)

### Dual Input Voltage

120/277 VAC, 60 Hz

### AC Input Current

280 mA

### AC Input Power Rating

3.5 Watts

### Test Switch

Single Pole

### Battery

High-Temperature,  
Maintenance-Free  
Nickel-Cadmium Battery  
7- to 10-Year Life Expectancy

### Battery Charging Current

280 mA

### Recharge Time

24 Hours

### Charging Indicator Light

LED

### Temperature Rating (Ambient)

0°C to +55°C  
(32°F to 131°F)


### Dimensions

9.4" x 2.4" x 1.5"  
(238 mm x 60 mm x 38 mm)  
Mounting Center 8.9" (226 mm)

### Weight

2.5 lbs. (1.13 kg)

*Emergency ballasts can be modified to accommodate special voltages, frequencies and longer run times.*

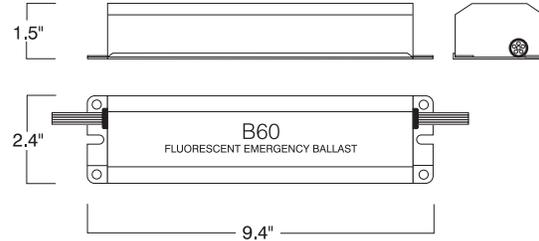

## APPLICATION

The B60 fluorescent emergency ballast works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into emergency lighting. The emergency ballast consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one compact red case. The B60 can be used with most 17 - 215 W (2' - 8') T8, T10 or T12 fluorescent lamps without integral starters, including U-shaped, HO, VHO, circline and energy-saving, and (4-pin) long compacts. It is also compatible with most one-, two-, three- and four-lamp electronic, standard, energy-saving and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The B60 is suitable for indoor locations. It is not suitable for air handling heated air outlets or wet, damp or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory.

## OPERATION

When AC power fails, the B60 immediately switches to the emergency mode, operating either one or two lamps at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the emergency ballast automatically returns to the charging mode and, using a patented circuit, delays AC ballast operation for approximately 3 seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits.

## INSTALLATION

The B60 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The B60 may be installed inside, on top of or remote from the fixture. The emergency ballast may be remotely installed up to half the distance the AC ballast manufacturer recommends removing the AC ballast from the lamp or up to 50 feet, whichever is less. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

## UL AND CODE COMPLIANCE

The B60 has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Light and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.


## Specifiers Reference

Project \_\_\_\_\_ Type \_\_\_\_\_ Model No. \_\_\_\_\_

Comments \_\_\_\_\_

L2000069

04/21/10 © Philips Emergency Lighting  
P.O. Box 460 Collierville, TN USA 38027-0460  
Sales 800-223-5728 FAX 901-853-5009  
Tech. Support 888-263-4638  
[www.philips.com/bodine](http://www.philips.com/bodine)



# B60

Fluorescent Emergency Ballast

**Two-lamp emergency illumination;  
End-of-lamp-life compatible**

## EMERGENCY ILLUMINATION

Depending on the number (one or two), wattage and type of lamps selected, the B60 produces 600 to 700 lumens initial emergency light output. If two-lamp operation is selected, light output is evenly divided between the lamps for better distribution of emergency illumination.

## SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Philips Bodine B60 emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 9 3/8" x 2 3/8" x 1 1/2" red metal case. A solid-state charging indicator light to monitor the charger and battery, a single-pole test switch and installation hardware shall be provided. The emergency ballast, using a patented circuit, shall delay AC ballast operation for approximately 3 seconds to prevent false tripping of AC ballast end-of-lamp-life shutdown circuits. The emergency ballast shall be capable of operating one or two (2' - 4') T8, T10 or T12 lamps, one 17 - 215 W (2' - 8') tubular lamp or one (4-pin) long compact lamp at reduced illumination in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor locations. The B60 shall have 3.5 Watts of input power and a 14.4 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside, on top of or remote from the fixture and shall be warranted for a full three years from date of purchase.

## WARRANTY

Model B60 is warranted for three (3) full years from date of purchase. This warranty covers only properly installed Philips Bodine emergency ballasts used under normal conditions. For the warranty period, Philips Emergency Lighting will, at its option, repair or replace without charge a defective emergency ballast, provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

L2000069

04/21/10 © Philips Emergency Lighting  
P.O. Box 460 Collierville, TN USA 38027-0460  
Sales 800-223-5728 FAX 901-853-5009  
Tech. Support 888-263-4638  
[www.philips.com/bodine](http://www.philips.com/bodine)

*For the most current technical information and notices, please visit TechNotes on our website.*