



VERSION INFORMATION (Vender)			
Rev.	Rev. Date	Modified By	Brief Description
V1	2021.04.16		LHY

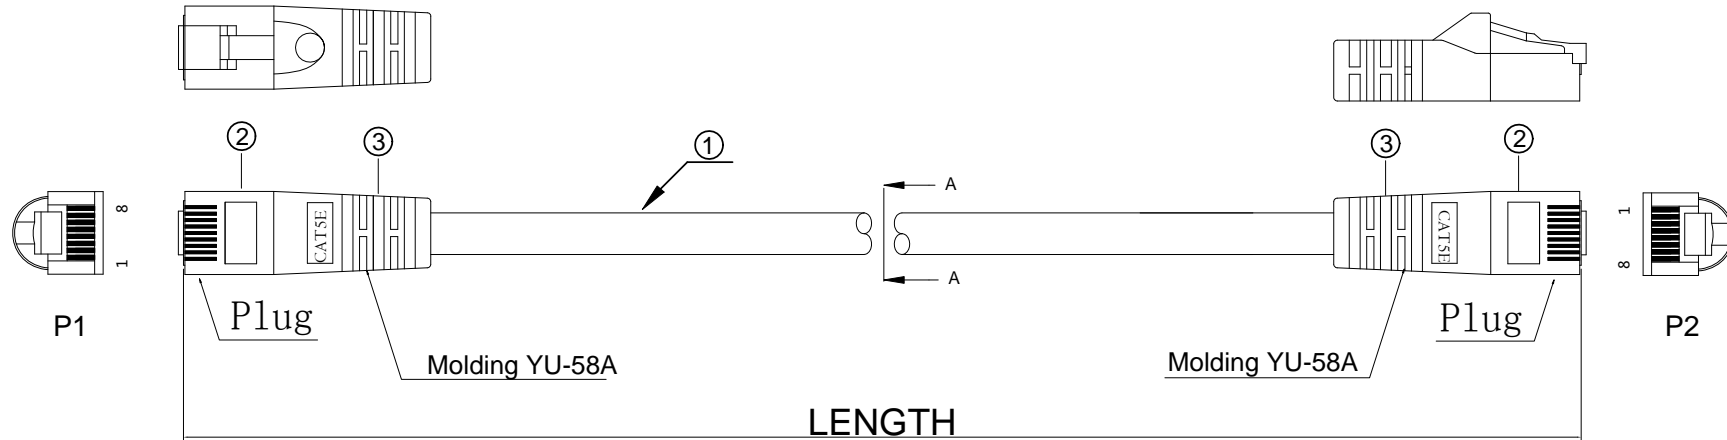

Marking: CAT.5E UTP PATCH ETL VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CMX(UL) E164469-XX RoHS WWW.MONOPRICE.COM

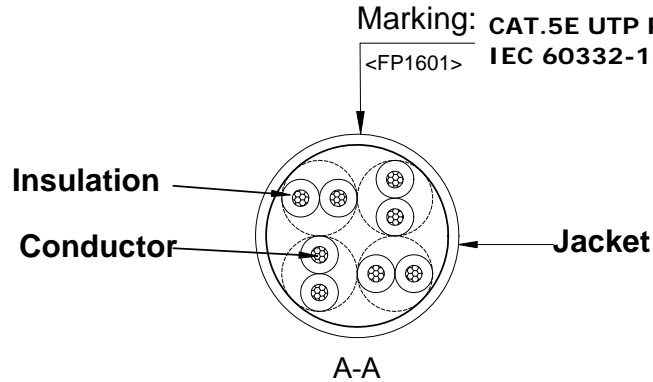

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1	X	1	WHT/ORG
2		2	ORG
3	X	3	WHT/GRN
6		6	GRN
4	X	4	BLU
5		5	WHT/BLU
7	X	7	WHT/BRN
8		8	BRN

Conductor	Bare Copper24AWG (7/0.196±0.015mm)
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.94±0.06mm
Jacket PVC	Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.6±0.3mm

NO	PART NAME	SPECIFICATION DESCRIPTION	QT	UNIT
②	Molding	YU-58A	2	AR
②	PLUG	8P8C 50u"	2	PCS
①	CABLE	LAN PATCH C5E UTP(W/O Cross) 24AWG 4P PVC	AR	FT
NO	PART NAME	SPECIFICATION DESCRIPTION	QT	UNIT



VENDOR CODE : V16895	DESCRIPTION : Monoprice Cat5e Ethernet Patch Cable - Snagless RJ45, Stranded, 350Mhz, UTP, Pure Bare Copper Wire, 24AWG			
APPROVED BY PM & DATE :	PID # :			
PM PRINT NAME : LHY	DATE : 2020.12.28	UNIT : MM	SHEET : 2 OF 2	FILE NAME :