


Rev.	Description	Date
A		04-2019

**Application**

Riser

**Flame Rating**

UL 1666

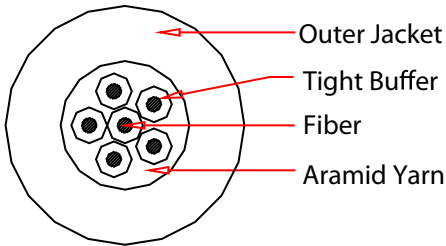


RoHS


**Product Specifications**

Construction & Material :

Item	Specifications
Product	Multimode, 62.5/125
Fiber Count	6
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Orange
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

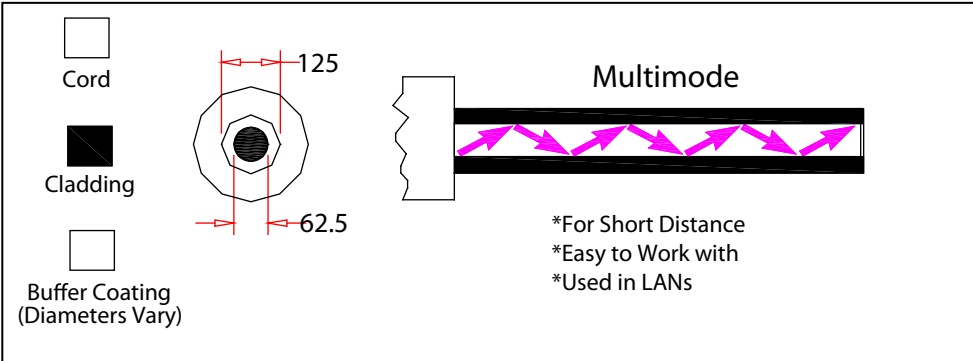


Physical Characteristics	Value
Nominal Outer Diameter (mm)	5.30
Weight (lbs/ km)	55
Minimum Bend Radius, Installation (cm), of 6 (fiber count)	7.95
Minimum Bend Radius, Operation (cm), of 6 (fiber count)	5.30

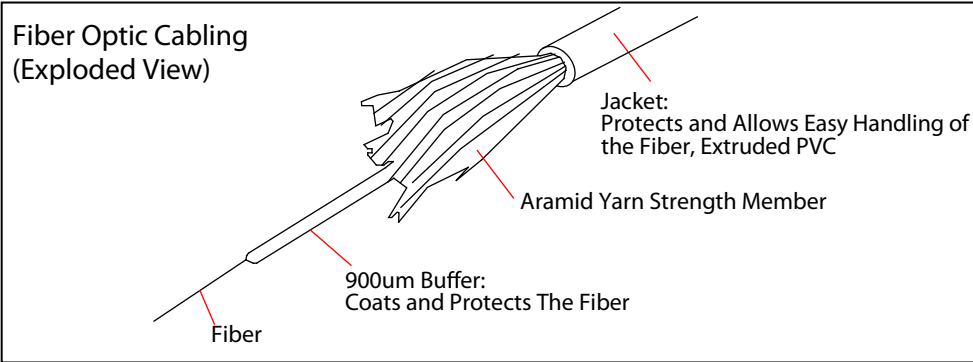

Optical Characteristics

Items	62.5/125
Core Size	62.5 um
Wavelength	(850/ 1300) nm
Max. Attenuation	(3.5/ 1.5) dB/ Km
Bandwidth (EMB) (High Performance)	220 MHz @850nm

Storage Temp	-40 °C / +70 °C
Operating Temp	-20 °C / +70 °C

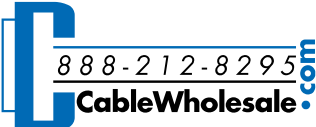Item Number:	10E2-206NH	
Title:	6 Fiber Indoor Distribution Fiber Optic Cable, Multimode, 62.5/125, Orange, Riser Rated, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	124	

No.	Specifications
-----	----------------