








BASIC OPERATION

- In emergency ensure the yellow Lithium primary battery is fitted.
- Before operation break off the red security tag from the battery.
- Turn on by pressing the  key
- The radio will turn on with the distress and calling channel 16 already selected
- Use the  and  keys to select the required channel
- Use the **VOL** key followed by the  and  keys to adjust the speaker volume
- Use the **SQ** key followed by the  and  keys to adjust the squelch (muting) level
- Use the PTT key to transmit

To transmit a MAYDAY call the following procedure should be followed.

Ensure the radio is turned on, channel 16 is selected and the PTT key is pressed. Announce the following clearly into the radio:

MAYDAY - MAYDAY - MAYDAY

"This is [Ship's Name] - This is [Ship's Name] -
This is [Ship's Name]"

"MAYDAY [Ship's Name or Call Sign]"

"Position..... [LAT and LON or description]"

"Nature of Distress is
[State the aid required]"


"The Number of Persons on board is...
[followed by any useful information]"

"Over"


912S-01014 Issue: 01.00

ACTIVATE IN EMERGENCY

- 1 Break seal on battery



- 2 Press  to turn on




- 3 Adjust radio (if required)

Select Channel  OR 

Adjust Volume  →  OR 

Adjust Squelch  →  OR 

- 4 Press PTT key to transmit

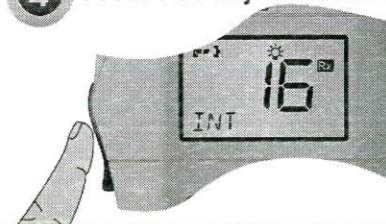

DEACTIVATE

 **PRESS AND HOLD**

Y1-03-0256 Rev. A